

Pre-CBS Telecaster Wiring


Vintage style Leo Fender Pat. (No Neck+Bridge)

Pos.1: Neck Pickup via Cap (Dark Mode) Tone Bypass

Pos.2: Neck Pickup With Tone Control

Pos.3: Bridge Pickup with Tone Control

3-Way Switch

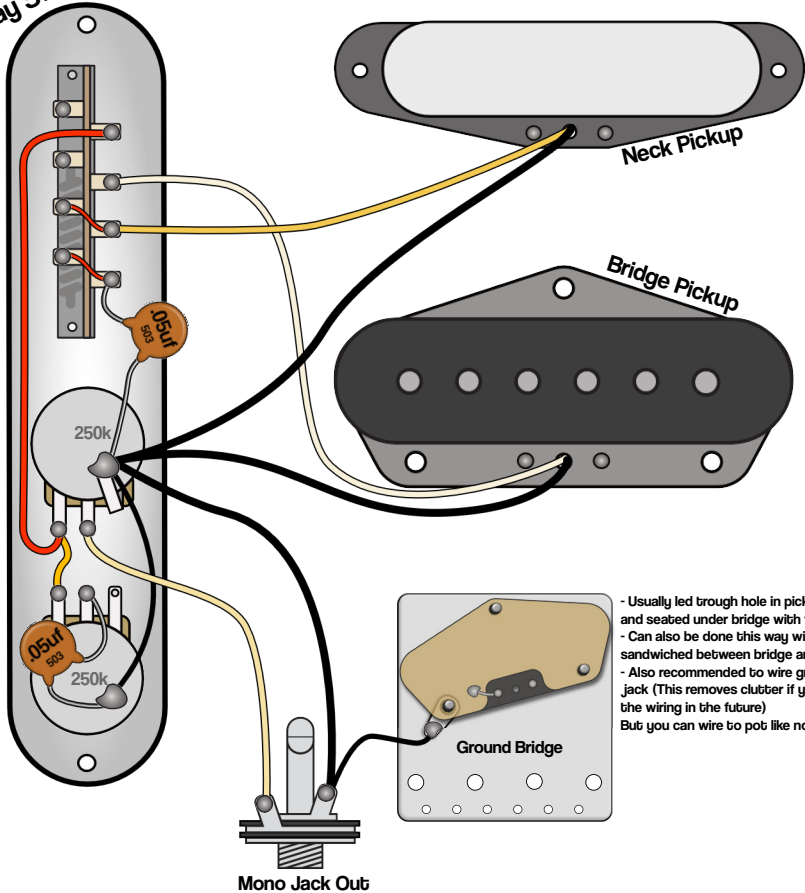

- Usually led trough hole in pickup cavity and seated under bridge with frayed wires.
 - Can also be done this way with a ground lug sandwiched between bridge and pickup.
 - Also recommended to wire ground straight to jack (This removes clutter if you are to work on the wiring in the future)
- But you can wire to poti like normal if you wish.

3.13.2026
Rev.A

www.axefiles.com

Graphics by Gerry Haze. all rights reserved