


American Elite Nashville HSS

017-6052

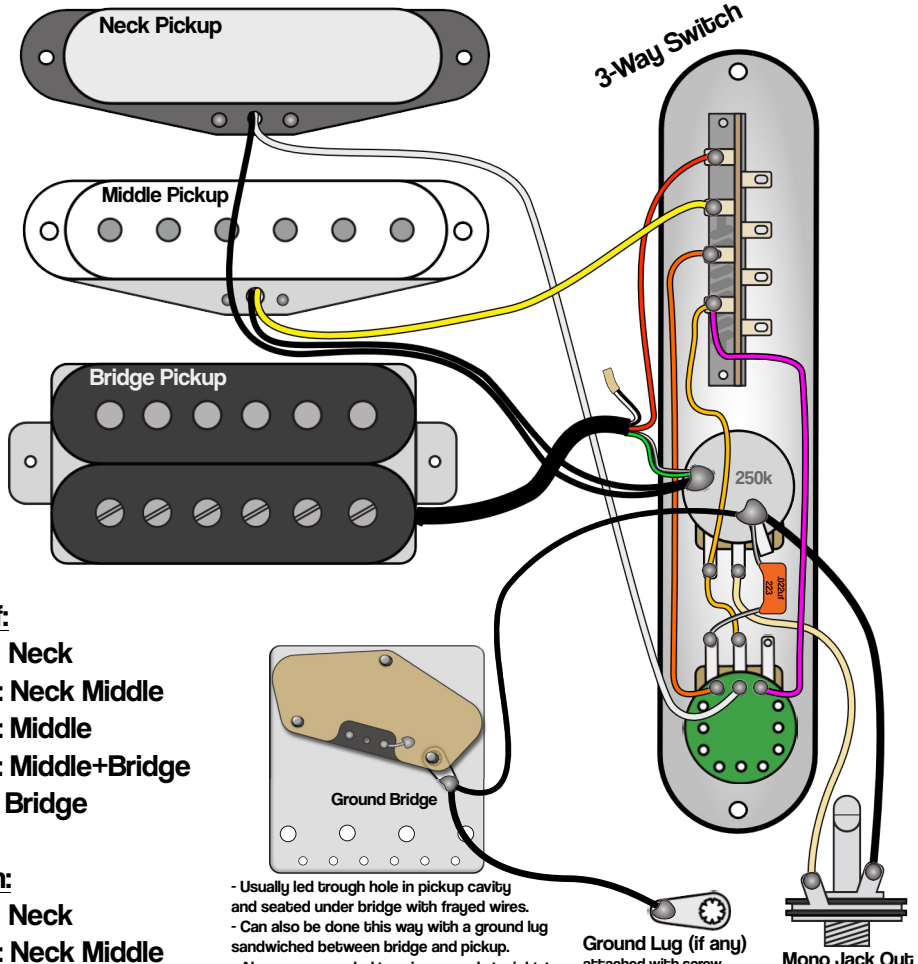

S1 Off:

- Pos.1: Neck
- Pos.2: Neck Middle
- Pos.3: Middle
- Pos.4: Middle+Bridge
- Pos.5 Bridge

S1 On:

- Pos.1: Neck
- Pos.2: Neck Middle
- Pos.3: Neck+Middle
- Pos.4: M+B+N
- Pos.5 Bridge+Neck

- Usually led trough hole in pickup cavity and seated under bridge with frayed wires.
- Can also be done this way with a ground lug sandwiched between bridge and pickup.
- Also recommended to wire ground straight to jack (This removes clutter if you are to work on the wiring in the future)
But you can wire to pot like normal if you wish.

Ground Lug (if any) attached with screw to bottom of cavity

Mono Jack Out

4.29.2026
Rev.A