


# Standard Greasebucket Wiring

017-0143/0144/0174

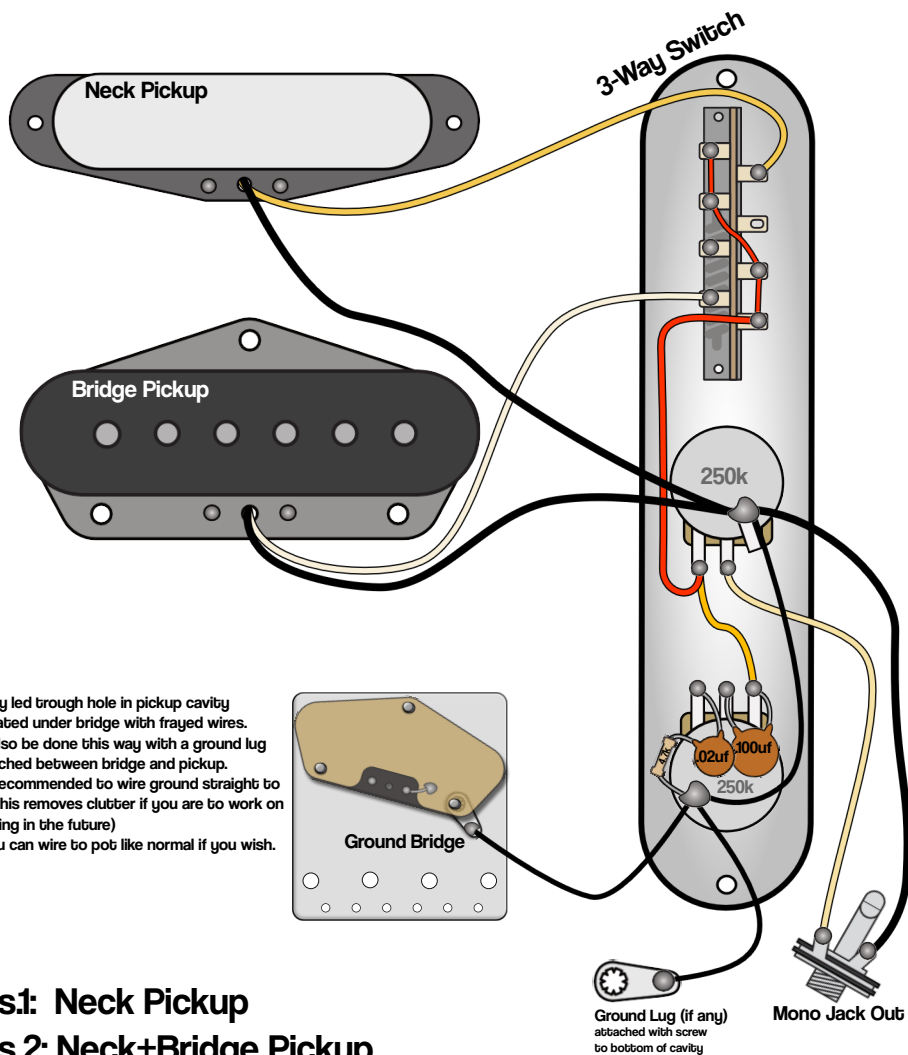

- Usually led through hole in pickup cavity and seated under bridge with frayed wires.
  - Can also be done this way with a ground lug sandwiched between bridge and pickup.
  - Also recommended to wire ground straight to jack (This removes clutter if you are to work on the wiring in the future)
- But you can wire to pot like normal if you wish.

**Pos.1: Neck Pickup**

**Pos.2: Neck+Bridge Pickup**

**Pos.3: Bridge Pickup**

*Greasebucket rolls of high without adding bass*

3.13.2026  
Rev.A

[www.axefiles.com](http://www.axefiles.com)

Graphics by Gerry Haze. all rights reserved