


# PARALLEL UNIVERSE II TELECASTER® MAGICO (0176782XXX)

## PARTS LAYOUT

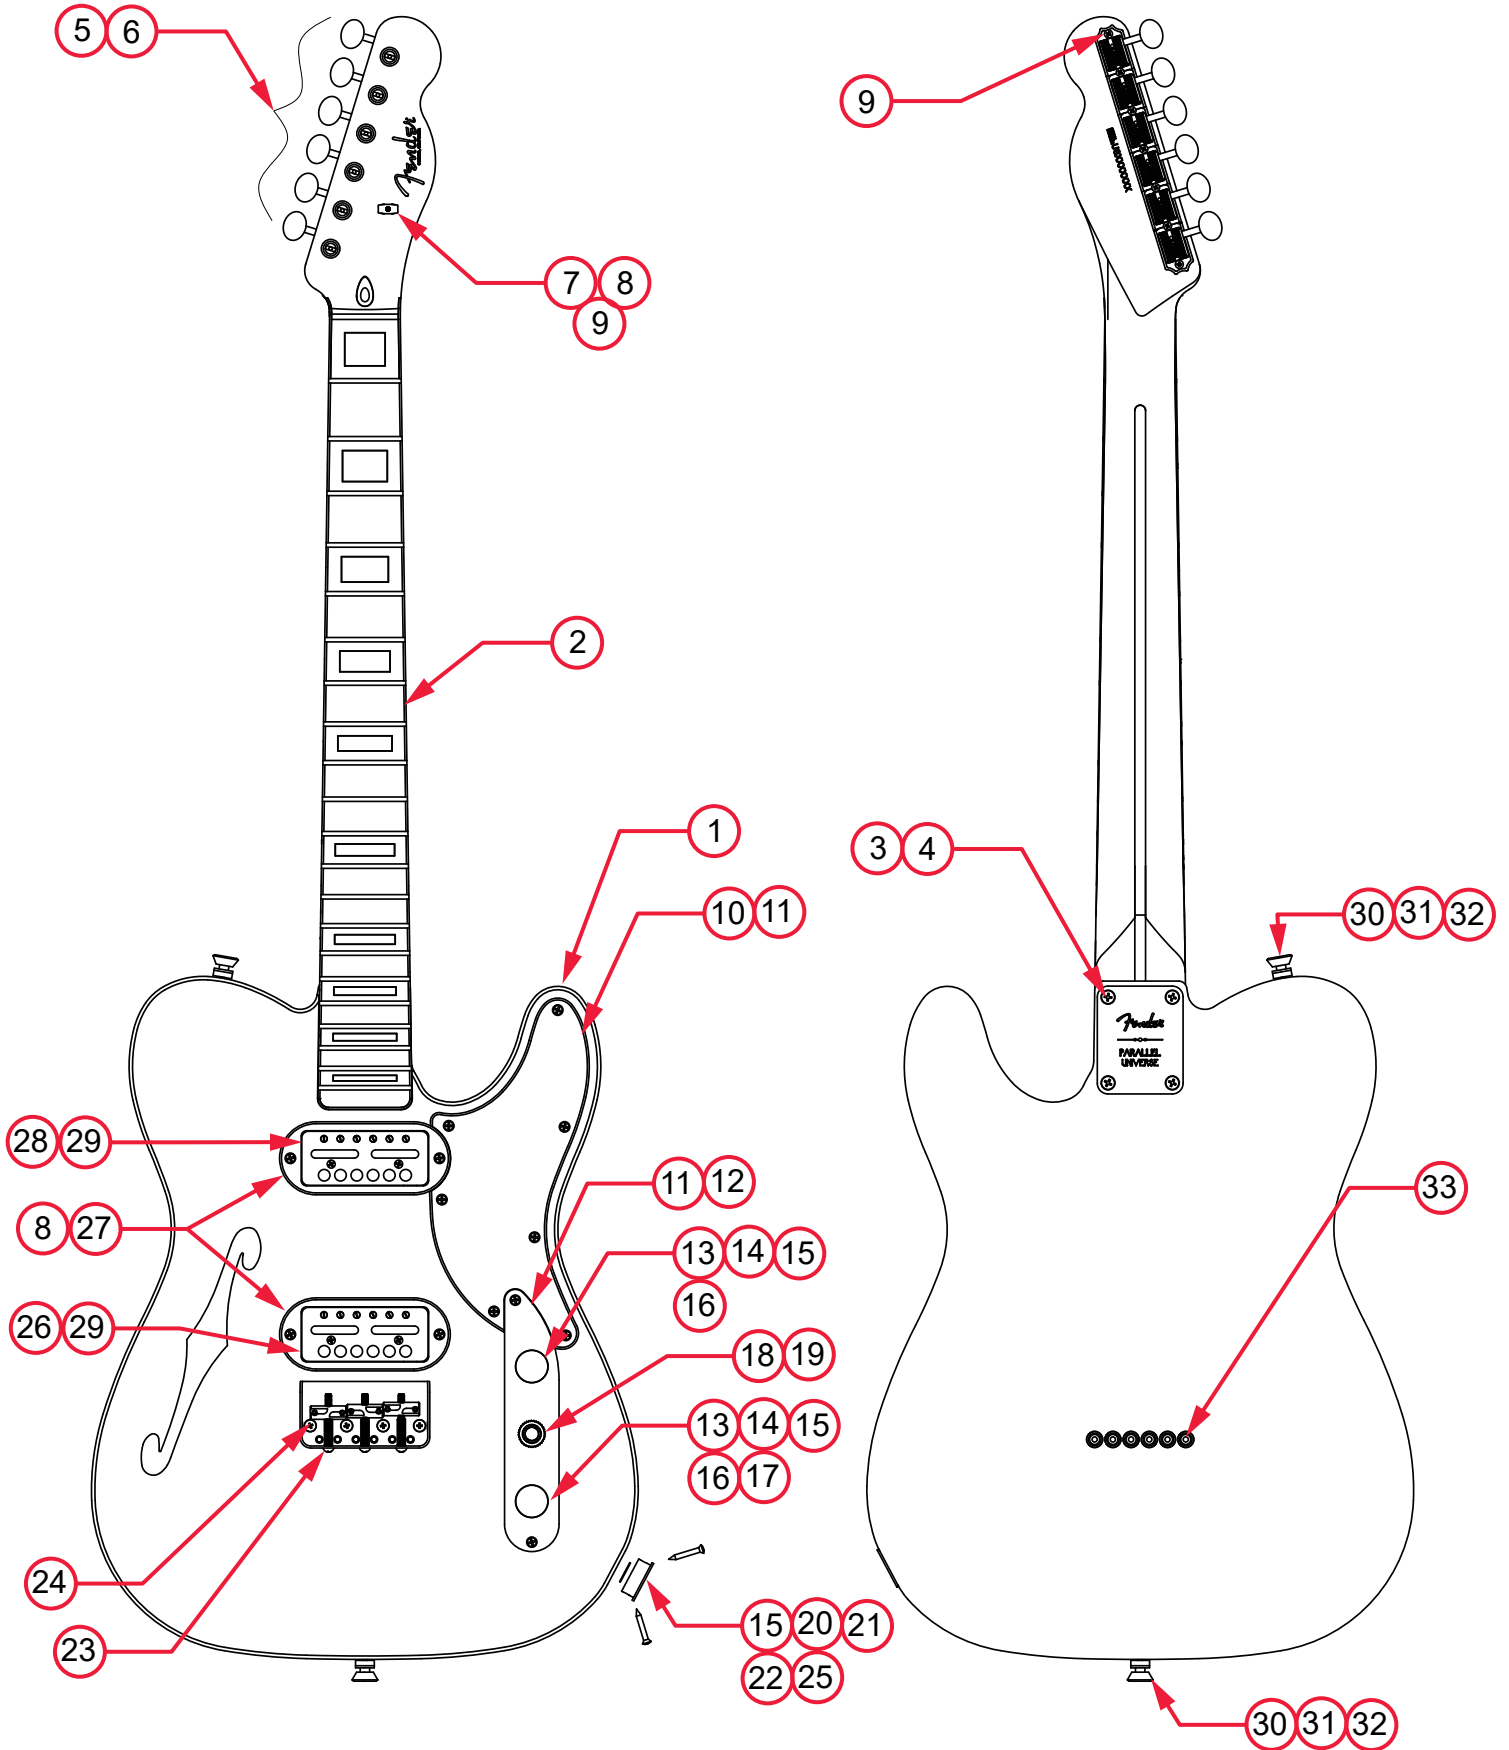

# PARALLEL UNIVERSE II TELECASTER® MAGICO (0176782XXX)

## PARTS LIST

REF#	DESCRIPTION	PART NUMBER
1	BODY TELE MAGICO PEARL BNDG DNB TRN	7717266526
1	BODY TELE MAGICO PEARL BNDG SFG TRN	7717266535
2	NECK ASSY TELE MAGICO MPL PEARL BNDG	7717261000
3	NECK PLATE PU II CHROME	7717714000
4	SCREW SMA 8 X 1-3/4 OHP NI	0015636049
5	KEY SET GTR VINT FENDER DLX NI PEARL BUTTON	0091059070
6	BUSHINGS STRING POST VINT (6)	0994946000
7	STRING TREE VINTAGE NI W/HDWR	0994910000
8	SPACER STRING TREE 62 STRAT	0020423000
9	SCREW SMAB 3 X 3/8 RHP STL NI	0011357049
10	PICKGUARD TELE MAGICO WHITE PEARLOID	7717283000
11	SCREW SMAB 4 X 1/2 OHP NI	0015578049
12	PLATE CONTROL TELE MAGICO CHR	7717277000
13	KNOBS CONTROL VINT TELE SET W/SCREW	0992056000
14	CONTROL 500K A.TAPER .25 x .625 S.SHAFT	0079409000
15	NUT HEX 3/8-32x3/32 TK NI	0016352049
16	WASHER LOCK INTL 3/8 X .687	0016436049
17	CAP MPF RDL .022MF 250V 10%	0024832049
18	3 WAY TOGGLE SWITCH CHR BH	0095088000
19	NUT HEX 12MM X 1MM NI	0031647049
20	JACK PHONE OPEN CIRCT 11	0021956049
21	JACK PLT CHROME C/S	0076007000
22	SCREW WOOD #4 X 3/4 OHP STL NI	0056156000
23	BRIDGE ASSY TELE MAGICO CHR	7717280000
23A	BRIDGE PLATE GE SMITH TELE CHR	0072653000
23B	BRIDGE SECTION AM PRO TELE REVERSE	7709970000
23C	BRIDGE SECTION AM PRO TELE STD	7709970000
23D	SCREW M 6-32x1-1/4 RHP NI	0015834049
23E	SPRING COMPRESSION 1 1/16 #144	0018689049
23F	SCREW SET 6-32 x 3/8 OP NI HEX	7710028000
23G	SCREW SET 6-32 x 5/16 OP NI HEX	7710422000
24	SCREW WOOD 6 X 1 OHP NI	0016188049
25	WASHER LOCKING INTL 3/8 X .500 X .020 NI	0022384049
26	PICKUP TELE MAGICO BRIDGE	7717351000
27	BEZEL PICKUP TELE MAGIC WHT PERLOID	7717281000


\*= NOT PICTURED IN DIAGRAM





# PARALLEL UNIVERSE II TELECASTER® MAGICO (0176782XXX)


## WIRING ASSEMBLY

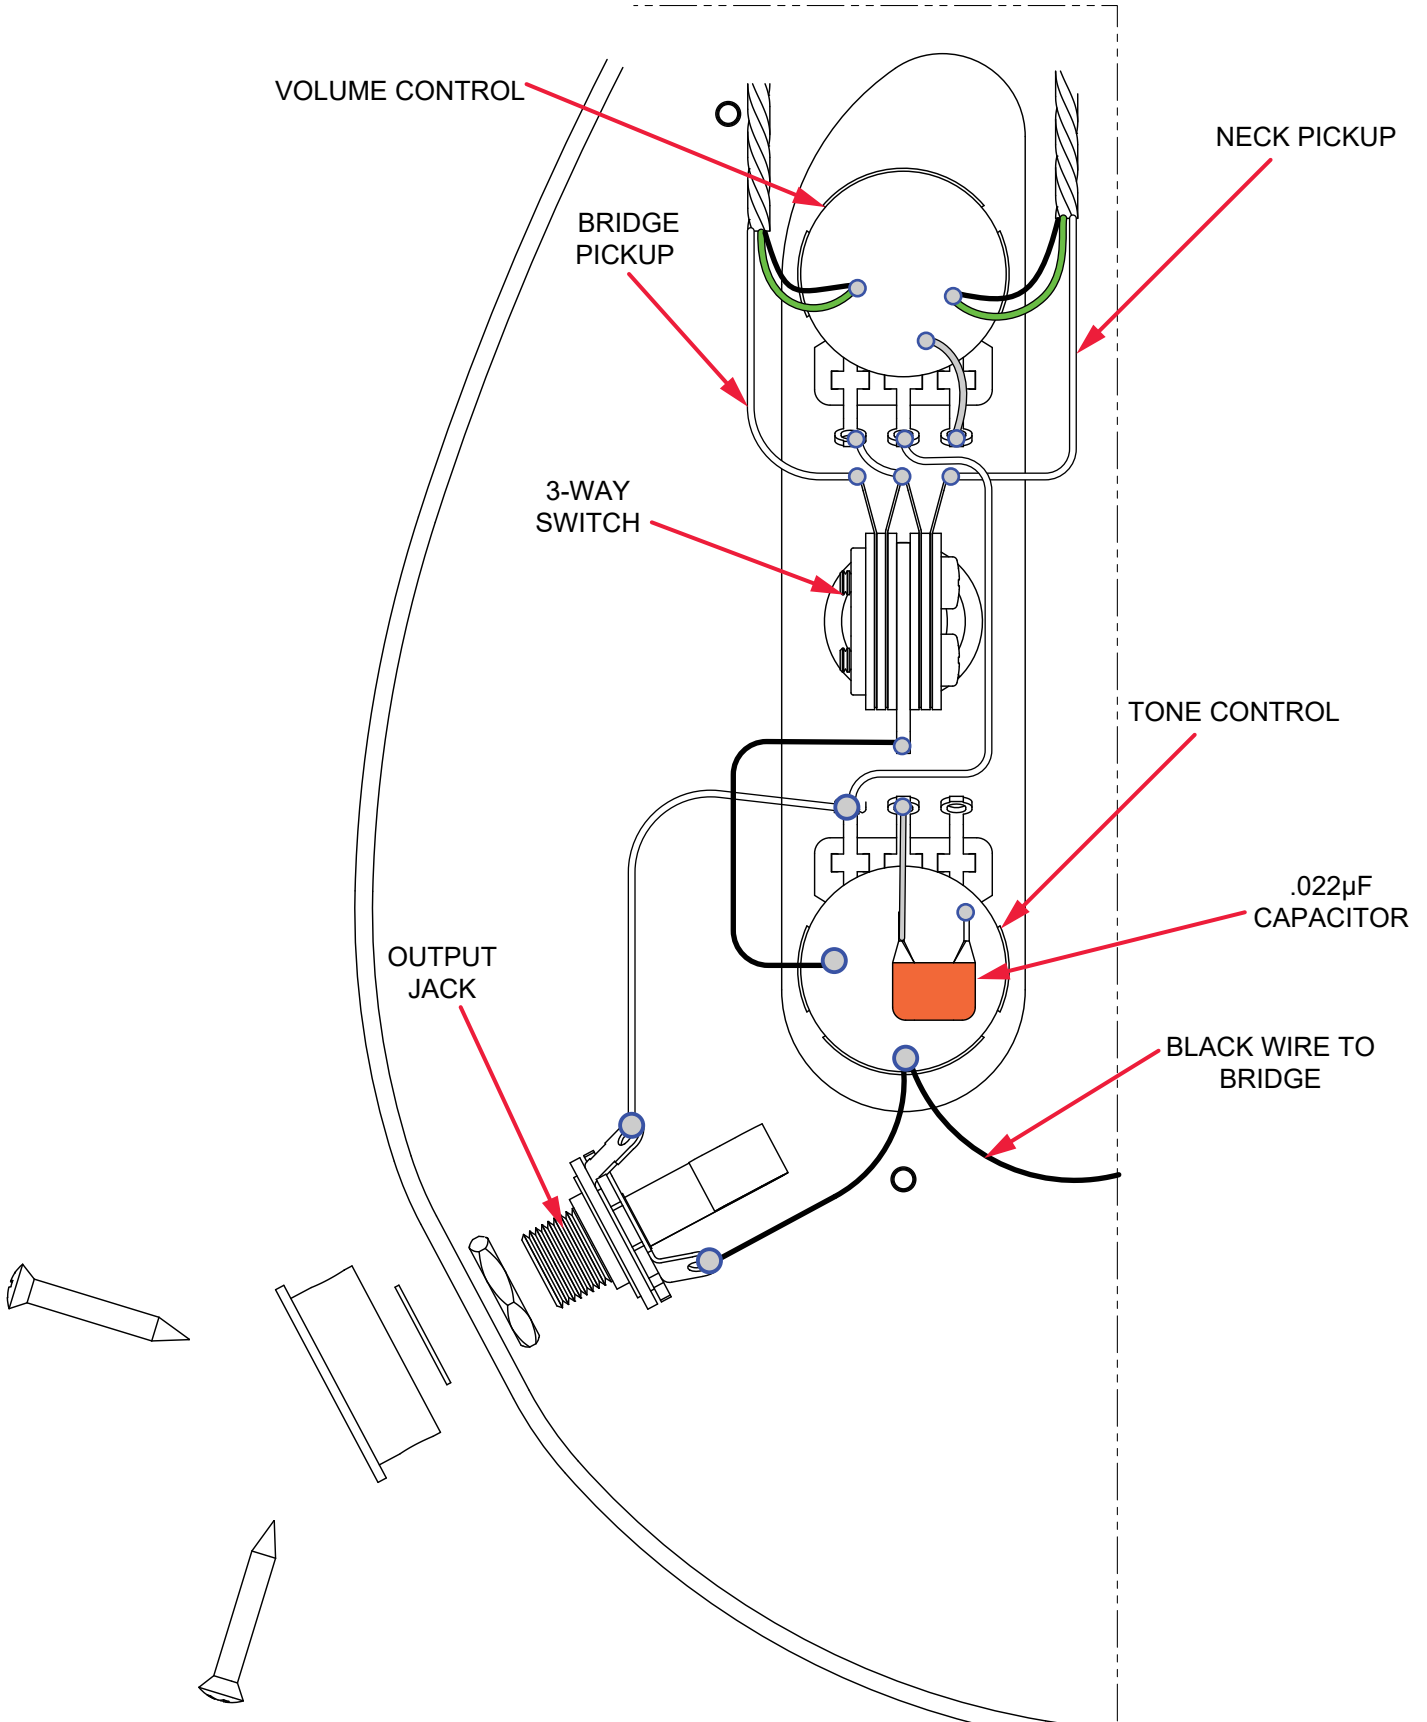

# PARALLEL UNIVERSE II TELECASTER® MAGICO (0176782XXX)



## SWITCH AND CONTROL FUNCTION



3 ● ○ ○	2 ○ ● ○	1 ○ ○ ●	SWITCH POSITION
			NECK PICKUP
			BRIDGE PICKUP
	PICKUP ON	INDICATES POSITION OF 3-WAY SWITCH ○ ○ ●	
	PICKUP OFF		

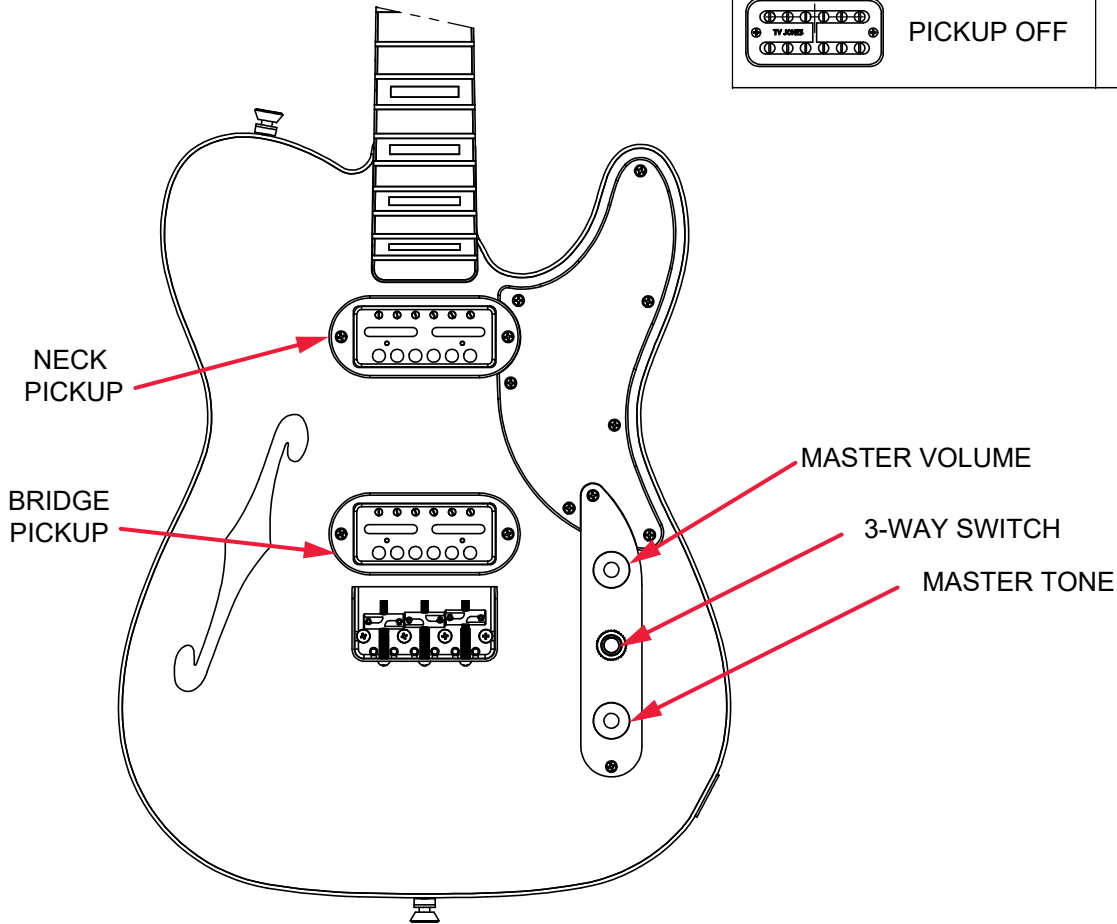


# PARALLEL UNIVERSE II TELECASTER® MAGICO (0176782XXX)

## ADDITIONAL SPECIFICATION DETAIL
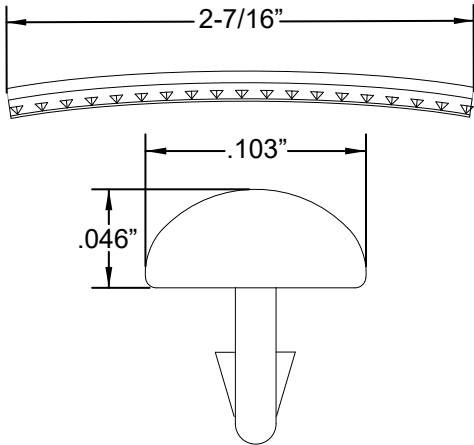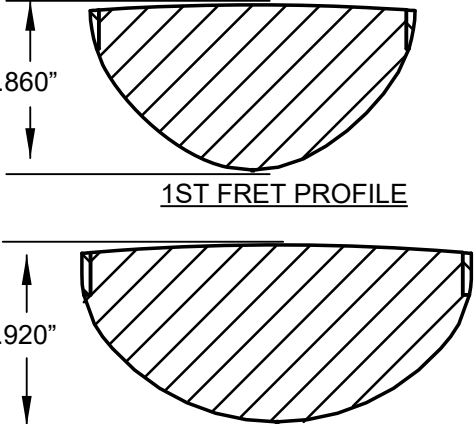
<p><b>FRET SIZE: MEDIUM JUMBO</b> (FRET DIMENSIONS ARE BEFORE INSTALLATION)</p> 	<p>PLEASE NOTE: AS EACH NECK IS SANDED &amp; FINISHED BY HAND, THICKNESS DIMENSIONS MAY VARY SLIGHTLY FROM THOSE SHOWN.</p>	<p><b>NECK PROFILE: SOFT "V" TO "C"</b></p>  <p><b>1ST FRET PROFILE</b> Height: .860"</p> <p><b>12TH FRET PROFILE</b> Height: .920"</p>
---	---	--
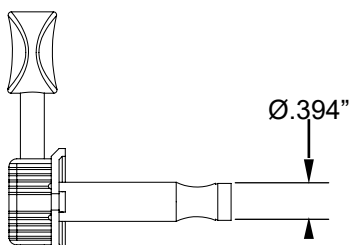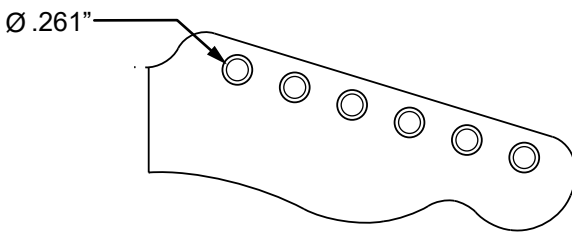
<p><b>TUNING MACHINE : P/N 0091059070</b> <b>OUTER SHAFT DIAMETER .250"</b></p> 	<p><b>TUNING MACHINE THRU-HOLE</b> <b>INNER DIAMETER .261"</b></p> 
--	--

**SADDLE HEIGHT ADJUSTMENT WRENCH:**  
**1/16" HEX KEY P/N 0021109049**

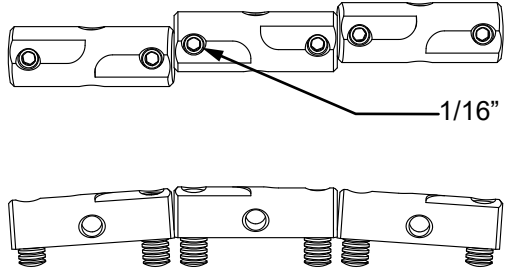


1/16" HEX

**SADDLE HEIGHT SET SCREWS**

TALL: P/N 7710428049      SHORT: P/N 7710422049


**TRUSS ROD NUT P/N 0994943000**  
**TRUSS ROD ADJUSTMENT WRENCH:**  
**1/8" HEX KEY P/N 0023811049**

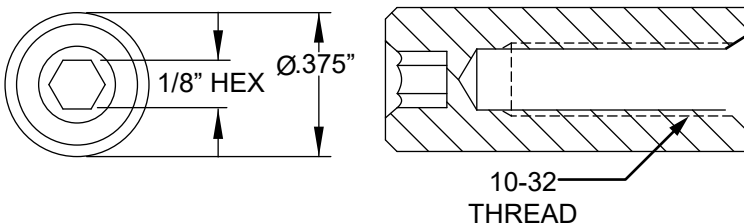

1/8" HEX      Ø.375"

10-32  
THREAD

**LOGO: AM PRO OFFSET TELE**  
**APPLIED UNDER THE FINISH**



PICKUP SPECIFICATIONS			
POSITION	MAGNETS	DC RESISTANCE	POLARITY
NECK	RUBBERIZED BAR MAGNET	5.9 - 6.5KΩ	SOUTH
BRIDGE	RUBBERIZED BAR MAGNET	7.0 - 7.6KΩ	NORTH